

LOUIS 1LT SQUAT PENDANT

SKU# 22586

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Abode product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep the instructions for future reference.

Warranty

- This fitting is covered by a 12 month warranty. The warranty is from the date of purchase, not the date of installation.
- If the fitting is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation Requirements

- This fitting must be assembled and installed by a licensed electrician.
- All wiring and installation of the fitting must adhere to the latest local and national wiring rules.
E.g. AS/NZS 3000 Electrical Installations.
- This fitting is a Class I product and must be earthed during wiring and installation
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This fitting is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the fitting.
 - Ensure the fitting is not installed in the direct line of an air vent/system.
 - If installing a fitting in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling.
- If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. To help with assembly, lay the fitting on its side on a smooth non-scratch surface.
2. Remove the mounting bracket (B) from the canopy (F) by loosening the nut (G).
3. Determine the suspension length required for your installation location. If the length of the suspension cord (H), requires adjustment, loosen the cord anchorage (G) on the mounting bracket (B) and adjust to the desired length. When completed, tighten the cord anchorage (G), take care not to overtighten and damage the cord (H).
4. Use the mounting bracket (B) as a template to mark the screw positions on the ceiling.
5. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (C) and anchors (A). Ensure the screws (C) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
6. Connect the mains supply wire to the terminal block (D). Ensure the wires are secure, and no bare wires are

exposed.

Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red

Luminaire Wire / Terminal block


Yellow/Green or 

Blue or N

Brown or L

NOTE: This fitting is a Class I product and must be earthed during wiring and installation.

7. Install the canopy (E) onto the mounting bracket (B) and secure it by tightening the nut (F).
8. Install a globe (L - not included) into the lamp holder (K). Do not exceed the maximum wattage rating.
9. Install the shade (M) onto the fitting by inserting it at an angle onto the hanging plate (J). Ensure the hanging plate (J) is centred and the shade (M) is secure.
10. Place the decorative cover (I) over the hanging plate (J).
11. After the installation is complete, switch on the fitting to test and enjoy your new lighting product.

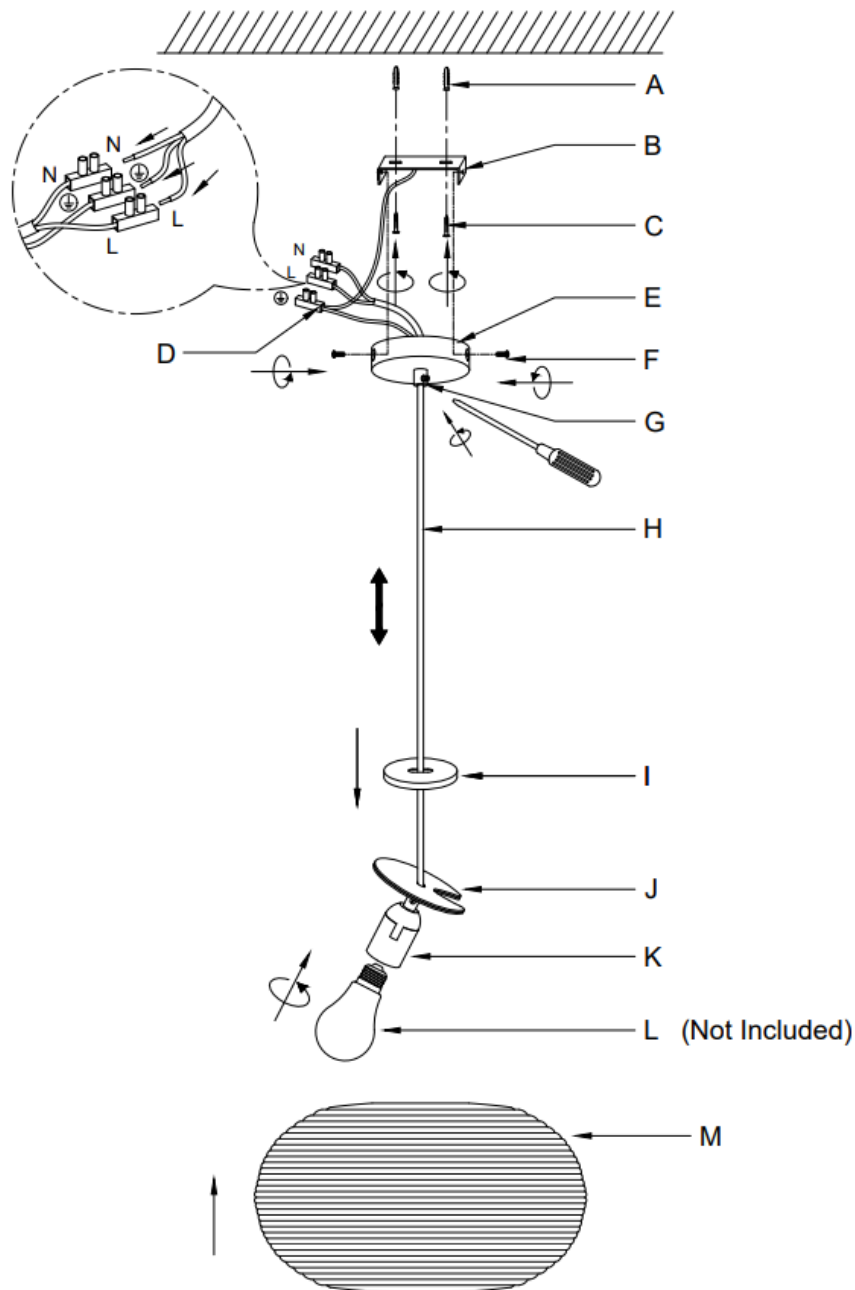

Safety Tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the fitting.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the fitting in water or other liquids.
- Ensure that the fitting does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

Installation Instructions



SKU #	#22586
Rated Voltage	220-240V~ 50Hz
Rated Wattage	45W Max.
Lamp Holder	ES / E27
Weight	2.0 KGS
Canopy Dimensions	H:25mm Dia:100mm
Luminaire Dimensions	H:200mm Dia:340mm Susp:2000mm