

LEDlux BANFF WALL LIGHT
SKU# 12537, 12538, 13094, 18128
Rated Voltage 220-240V~ 50Hz

THANK YOU FOR PURCHASING THIS QUALITY LUCCI PRODUCT, TO ENSURE CORRECT FUNCTION AND SAFETY, PLEASE READ AND SAVE ALL INSTRUCTIONS CAREFULLY BEFORE USING THE PRODUCT.

Warranty

- This light fitting is covered by a 1 year warranty; please retain proof of purchase and evidence of installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.

Installation requirements

- Must be installed by a Licensed Electrician.
- All wiring must adhere to local and national wiring codes. eg. AS/NZS 3000 latest edition.
- This fitting is a Class I product and must be earthed.
- This fitting is rated IP54, this must be maintained during installation.
- The mounting point must be able to support 2 times the weight of the fitting.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there is no component's missing before assembling.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure all power to the circuit you are working on has been switched OFF.
- Select a suitable location for installation. This fitting is protected against water penetration to IP54 standards, which is splashing in every direction.

Installation directions

1. Remove the mounting bracket from the back of the fitting by loosening the two screws on the side.
2. Use the mounting bracket as a template to mark the screw positions onto the wall.
Drill holes into the wall and push the plastic anchors into the holes.
Install the mounting bracket onto the wall by using the mounting screws and rubber washers provided.
Ensure the screws used are suitable for the mounting surface.
3. Connect the mains supply wire to the terminal block at the back of the fitting.
Ensure that the wires are secure and no bare wires are exposed.

Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red


Fitting Wire

Yellow/Green ④

Blue

Brown

Install the fitting back onto the mounting bracket and tighten the two screws on the side.

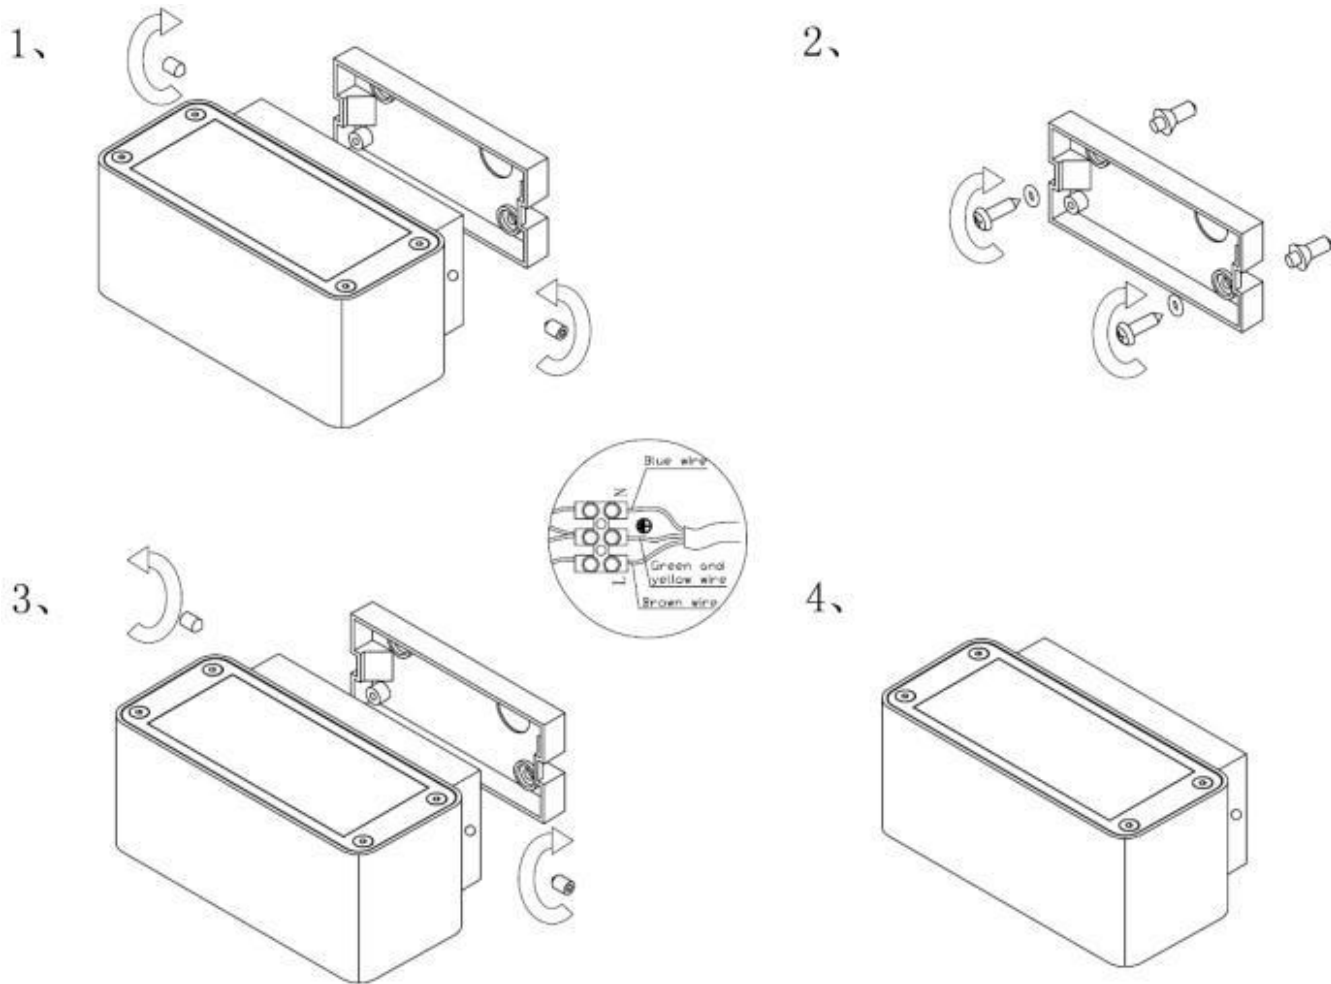

Safety tips

1. Always ensure the power is OFF and the fitting has cooled down before performing any maintenance or adjustment to the fitting.
2. To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
3. Find a suitable location away from liquids and hazards.
4. Ensure that the fitting does not come in contact with corrosive chemicals, etc.
5. To clean, wipe with a damp clean cloth. Never soak the fitting with water.

Specifications				
SKU #	12537	12538	13094	18128
Item #	KE-2631-LED-SL	KE-2631-LED-CA	KE-2631-LED-WH	KE-2631-LED-BK
Finish	Silver	Carbon	White	Black
Rated Voltage	220-240V~ 50Hz			
Rated Wattage	12W			
LEDs	3000K, 360lm			
IP Rating	IP54			
Weight	0.88kg			
Dimensions	W:150mm H:65mm E:90mm			