

Installation Instructions

SKU#17484,#17485

Rated Voltage 220V-240V~ 50Hz

Thank you for purchasing this quality product. To ensure correct function and safety, please read and follow all instructions carefully before using the product. Please keep instructions for future reference.

Warranty

- This light fitting is covered by a 36 month warranty.
Please retain proof of purchase and evidence of installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.

Installation requirements

- Must be installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules.
eg. AS/NZS 3000:2007/Amendment 2:2012 Electrical installations.
- Select a suitable location for installation;
 - This product has an IP54 rating and this must be maintained during installation
 - This product is suitable for indoor or outdoor use.
 - The mounting point must support 2 times the weight of the fitting.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF.

Installation directions

Warning: For your safety, all electrical connections must be performed by a licensed electrician.

Read the installation guide below, and the installation diagram to complete the installation:

1. Remove all packaging material from the product.
2. Unscrew the Fixing Cover Screws then Remove the cover.
3. Secure the mounting bracket to the mounting surface with the mounting screws.
4. Remove the terminal box cover to access the terminal block and connect the mains supply wires.

Mains Supply Wire

Earth – Yellow/Green 

Neutral – Blue or Black

Live – Brown or Red

Terminal marking


Yellow/Green or 

Blue or "N"

Brown or "L"

5. Re-fit the cover, and tightly secure with cover fixing screws and washer.(O-Ring must be under washer)
6. Switch ON to check the product has been installed correctly.

Installation Instructions

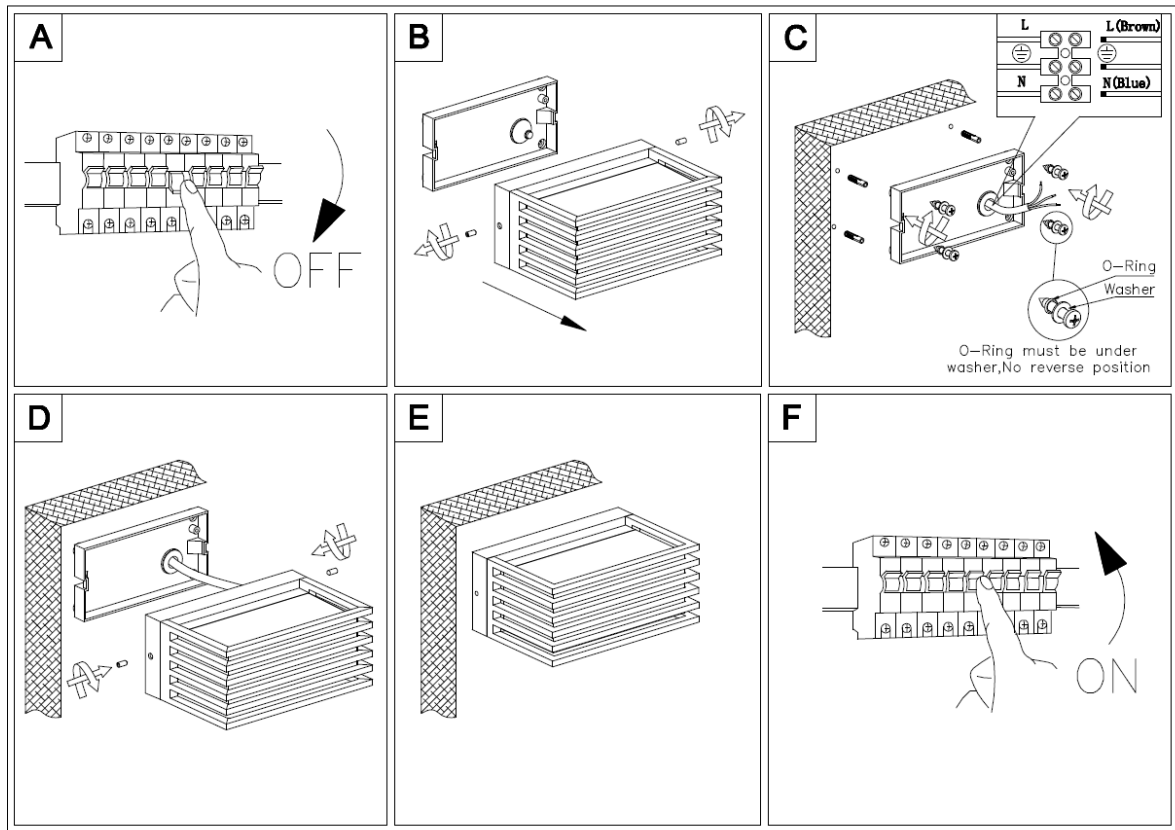

Safety tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, changing the globe or adjustment to the fitting.
- Do not touch the globe with bare hands. Use a clean cloth, gloves or a tissue.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a damp clean cloth. Never soak the fitting with water.

Specifications

SKU #	#17484	#17485
Model #	KE-M1562-BK	KE-M1562-SL
Color	Black	Silver
Rated Voltage	220-240V~ 50Hz	
IP rating	IP54	