

ROMANO WALL BRACKET

SKU# 22570, 22571

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality LEDlux product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 3 year warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician the warranty will be void.
- Please retain proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation Requirements

- Must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
eg. AS/NZS 3000 Electrical installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This product has an IP44.
 - The mounting point must support 2 times the weight of the luminaire.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. Put the fitting on a non-scratch surface to help with assembly.

1. Cut an installation hole of Ø 76mm into the wall.
2. Loosen the three screws on the front plate and take the luminaire parts out from the mounting bracket.
3. Gently pull the supply cords through the installation hole.
4. Gently pull the supply cords through the mounting bracket.

NOTE: Make sure the water-proof gasket is in place between the mounting bracket and the wall.

5. Install the mounting bracket into the cut out hole. Push the mounting clamps outward and tighten the screws on the mounting bracket until the mounting clamps are clamped firmly on the wall.

6. Connect the mains supply wire to the terminal block. Ensure the wires are secure and no bare wires are exposed.

Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue

Live – Brown

Luminaire Wire / Terminal Block

Yellow/Green or 


Blue or N

Brown or L

7. Put all luminaire parts back to the mounting bracket. Install the front plate back to the mounting bracket by tightening the three screws.
8. Install the decorative plate onto the front plate then lock it by its decorative ring.

9. Install the shade onto the luminaire.

10. After the installation, switch on the luminaire to test all the lighting functions and enjoy your new lighting product.

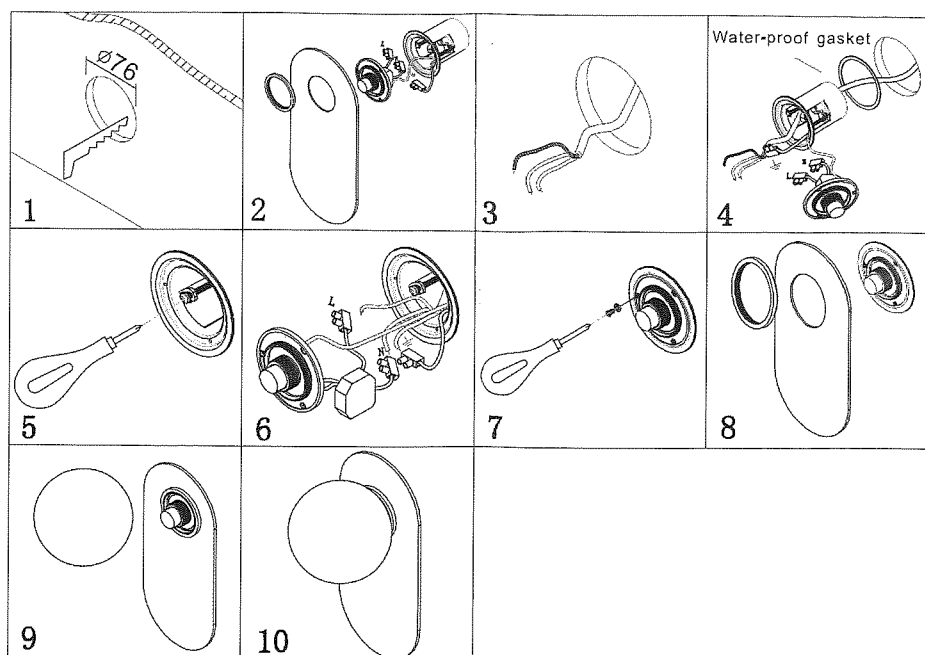

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- The luminaire must not be used if the protective shield has been cracked. Replace any cracked protective shield before using the luminaire.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the luminaire in water or other liquids.

Specifications

SKU #	22570	22571
Colour	Black with opal glass	Brass with opal glass
Rated Voltage	220-240V~ 50Hz	
LEDs	8.5W 450Lumens CRI 90 3000K	
Dimensions	W: 120mm E: 185mm H: 260mm	
Cut out	Ø76mm	
IP	IP44	
Weight	0.6kg	
Dimmer information	Buster + Punch DIM-002 DIGINET LED Smart MEDM; Clipsal 31E2RUDM, 32E450TM, 32E450UDM, 31E2PUDM and 32ELEDMD; HPM: Cat. 400T	