

Installation Instructions

MASINA PENDANT

SKU# 23762

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality ABODE product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 36-month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. E.g., AS/NZS 3000 Electrical Installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This luminaire is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the luminaire.
 - Ensure the luminaire is not installed in direct line of an air vent/system.
 - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.

- Take care not to pull any electrical wires during unpacking as this may damage the connection.

•

NOTE: Dimming may cause buzzing sounds or a slight flicker. There may be slight delays with the LED luminaire start-up or uneven light performance when more than one LED luminaire is linked together, switched ON or dimmed. This is not a product fault and as such is not covered under warranty.

NOTE: Some dimmers have a minimum load of 20W. Ensure the dimmer position is on the maximum setting before turning on the LED light and adjust the dimmer down to your desired light level.

NOTE: Testing cannot account for installation variables such as variation in mains supply voltage, cable capacitance, electrical noise, transients, surges and ripple control signals.

NOTE: The information provided is correct to the best of Lighting Direct's knowledge at the date of publication.

- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.

Installation Instructions

- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. Determine the suspension length required for your installation location. If the length of the suspension cord , requires adjustment, loosen the cord anchorage and adjust the length of the suspension cord.
3. Remove the mounting bracket from the canopy by loosening the screws (B).
4. Use the mounting bracket as a template to mark the screw hole positions on the ceiling.
5. Install the mounting bracket onto the ceiling by using appropriately sized mounting screws (B) and anchors. Ensure the screws and anchors used are suitable for the mounting surface and the surrounding environment.

Installation Instructions

6. Connect the mains supply wire to the terminal block (E).

Mains Supply Wire


Earth – Yellow/Green
Neutral – Blue or Black
Live – Brown or Red

Luminaire Wire / Terminal block

Yellow/Green or 
Blue or N
Brown or L

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.

7. Ensure the wires are secure, and no bare wires are exposed.
8. Install the canopy (F) onto the mounting bracket and secure by tightening the screws (B).
9. Install the glass shade onto the luminaire. Take care not to crack or damage the shade during installing.
10. After the installation, switch on the luminaire to test and enjoy your new lighting product.

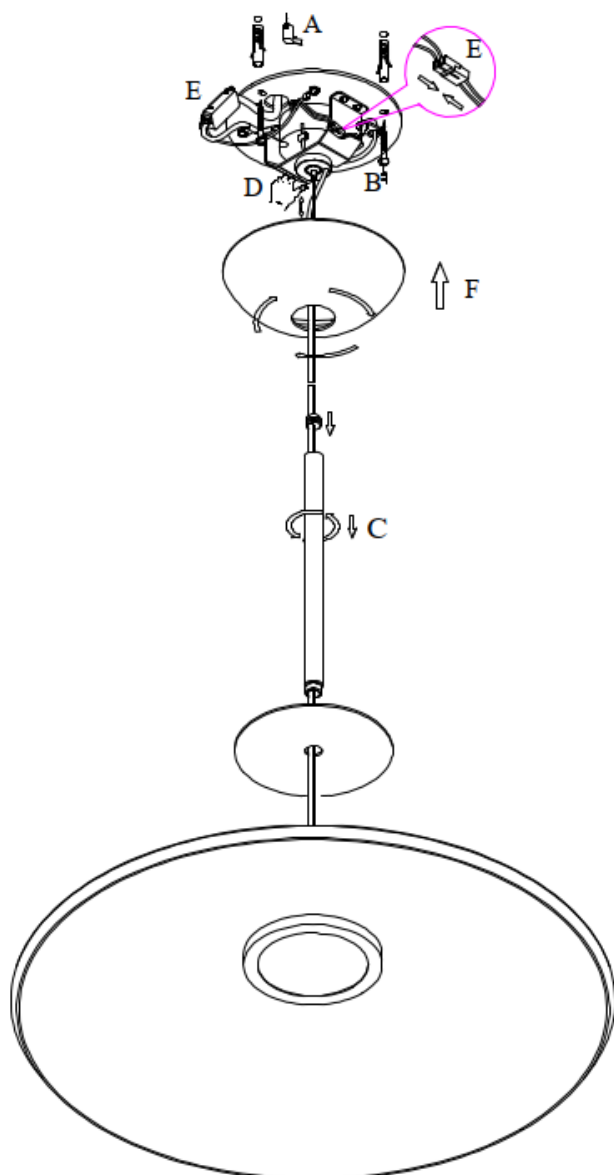

63A001-DIM

Installation Instructions

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globes or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- To clean wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	23762
Colour	Smoke
Rated Voltage	220-240V~ 50Hz
Rated Wattage	18W