

FESTOON II LED PARTY LIGHTS

SKU# 20920, 21203

Rated Voltage 24V DC

**NOTE: This luminaire can be DIY and does not require any electrical connection or disconnection.
When working with 240V, a licensed electrician is required.**

Thank you for purchasing this quality LEDlux product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 3-year warranty valid for in-store replacement or refund only.
- The warranty period starts from the date of purchase. Please retain the proof of purchase for any warranty enquiries.
- This luminaire is not suitable for use with dimmer switches. The warranty will be void if the luminaire is used on the same circuit, which has a dimmer switch.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire is designed to be used with a mains power socket outlet (not included).
The installation location must have an existing mains power socket outlet (not included) pre-installed.
If you don't have an existing mains power socket outlet (not included), please contact your licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules.
E.g. AS/NZS 3000 Electrical installations. If unsure, please contact a licensed electrician.
- Select a suitable location for installation:
 - The mounting point must support 2 times the weight of the luminaire.
 - This luminaire is protected against water penetration to IP65 standards, which is against low-pressure jets of water from all practicable directions.

**NOTE: The plug-in power supply is rated IP20 and has no protection against water penetration.
Must be installed in a dry location.**


- Only use the supplied plug-in power supply with this luminaire.
- The luminaire must not be used if the protective shield has cracked. Replace any cracked protective shield before using the luminaire.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling.
If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Do not plug into the mains power socket outlet before or during assembly. Only do so after the luminaire is fully assembled and is ready to use for the first time.

Installation Directions

1. Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.
2. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.
3. Using the loops (B) on the luminaire, hang the luminaire up onto hooks (C - not included).
4. Connect the luminaire to the plug-in power supply (A) and tighten the bi-pin plugs.

NOTE: Only use the supplied plug-in power supply with this luminaire.

5. Insert the plug-in power supply (A) into mains power socket outlet (not included) and ensure it is fully plugged in.
6. Switch on the luminaire to test all the lighting functions and enjoy your new luminaire

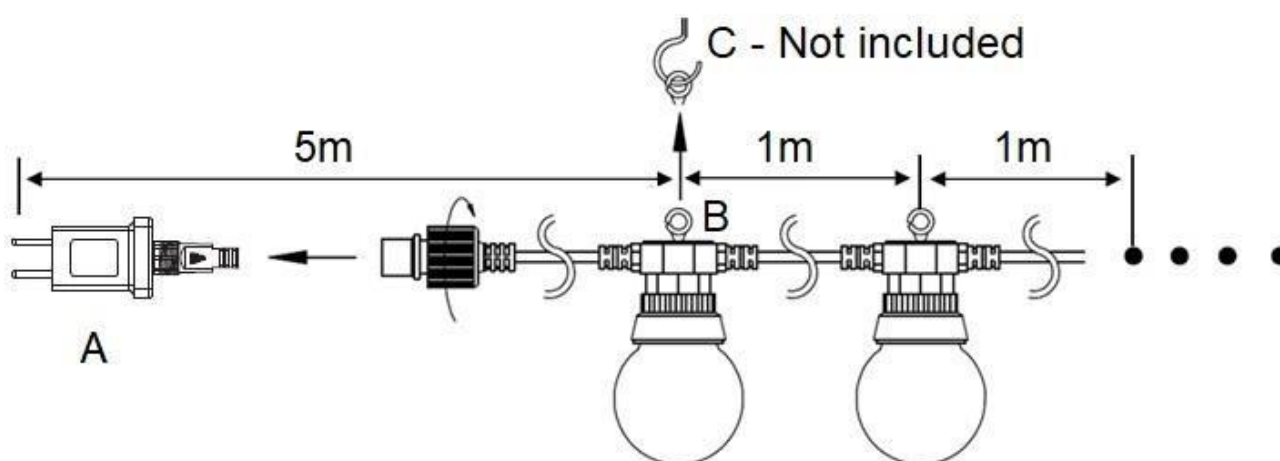

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and connectors are secure before connecting the power.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cable or cord is damaged, the luminaire shall be destroyed.
- The luminaire must not be used if the protective shield has cracked. Replace any cracked protective shield before using the luminaire again.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life, the whole luminaire shall be replaced. There are no serviceable parts, do not attempt to dismantle or open the product

Specifications		
SKU #	20920	21203
Description	20LT 25m Party Lights	10LT 15m Party Lights
Insulation Class	Class III	
Rated Voltage	24V DC	
Rated Wattage	9W	
LED Specs	150 lumens, 3000K Warm-White, Non-dimmable	100 lumens, 3000K Warm-White, Non-dimmable
Weight	1.1kg	0.66kg
Dimensions	Distance to first light – 5m Distance between lights – 1m Total distance – 25m	Distance to first light – 5m Distance between lights – 1m Total distance – 15m
IP Rating	IP65 (luminaire only) IP20 (plug-in power supply only)	

NOTE: The plug-in power supply is rated IP20 and has no protection against water penetration.
Must be installed in a dry location