

Installation Instructions

RENA Wall Light

SKU# 22592

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality LEDlux Wall light. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use. Please keep instructions for future reference.

Warranty

- This LED Wall light is covered by a 3 year warranty. The warranty is from date of purchase, not the date of installation. Please retain proof of purchase.
- If the luminaire is not assembled and installed by a licensed electrician the warranty will be void.
- Please retain proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation Requirements

- Must be assembled and installed by a licensed electrician
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. eg. AS/NZS 3000 Electrical installations
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - The mounting point must support 2 times the weight of the luminaire.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the LED wall light has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. Put the fitting on a non-scratch surface to help with assembly.
2. Use the mounting bracket as a template to mark the screw positions on the wall.
3. Install the mounting bracket onto the wall by using appropriately sized mounting screws and anchors. Ensure the screws and anchors used are suitable for the mounting surface and the surrounding environment.
4. Connect the mains supply wire to the terminal block. Ensure the wires are secure and no bare wires are exposed.

Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue

Live – Brown

Luminaire Wire / Terminal Block

Yellow/Green or 


Blue or N

Brown or L

5. Connect the driver to the lamp holder with the quick connector.
6. Hang the gypsum shade onto the mounting bracket.

Installation Instructions

7. To operate the colour shifting function, use the wall switch.
- While the luminaire is on, toggle the wall switch OFF and ON again within 3 seconds
- The colour shifting sequence will shift from 3000K - 5000K - 4000K.
- For the colour shifting to memorise the colour temperature, leave the wall switch OFF for over 7 seconds
- To reset the colour shifting, toggle the wall switch OFF and ON twice within 1 second
8. After the installation, switch on the fitting to test and enjoy your new lighting product.

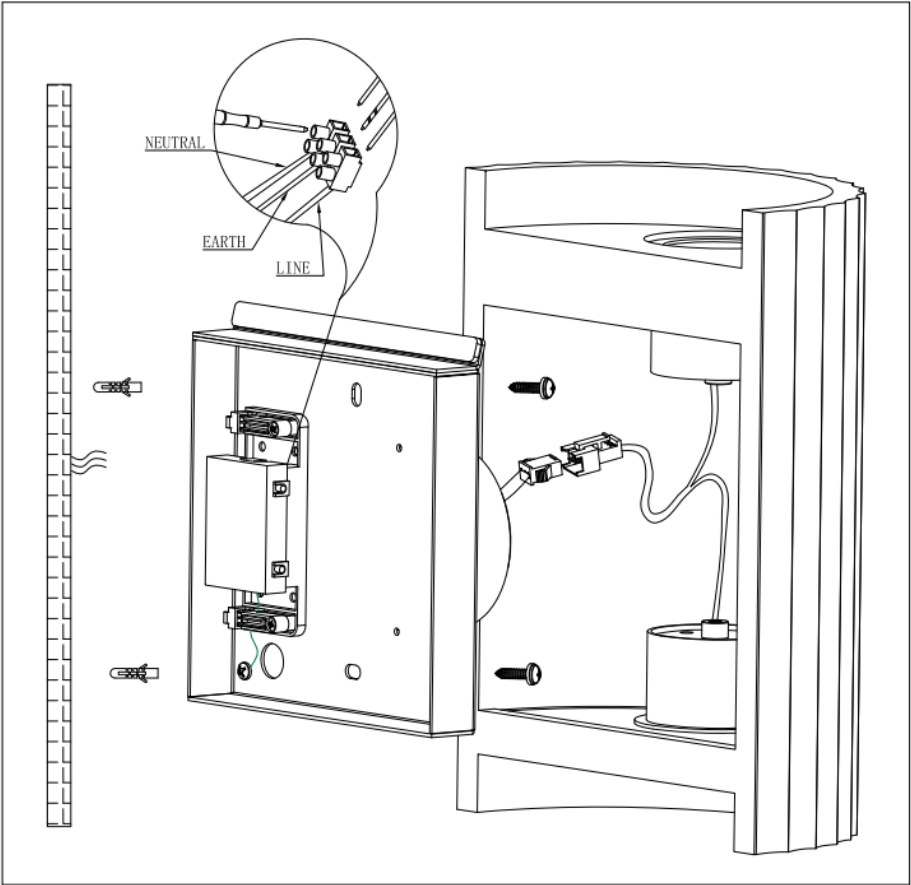

Safety tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globes or making any adjustment to the LED wall light.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp clean cloth. Do NOT soak or immerse the product in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications	
SKU #	22592
Colour	White
Rated Voltage	220-240V~ 50Hz

Installation Instructions

LED Specs	18W 1200 Lumens 3000K-5000K-4000k
Weight	1.85kg
Dimensions	H:220mm W:156mm E:90mm